






Energy Saving Insulation
Have you been looking for ways to increase building energy efficiency without major
construction or taking up valuable space? Need to insulate and protect but not change the
appearance of the building?

Syneffex[™] is 21st century technology that makes it possible to insulate and protect surfaces with a clear, thin film coating. From insulating skylights, roofs, and walls to remediating lead, our award-winning coatings provide THE best solution. They're clear, powerful, and applied as easily as a paint.

The Solution is Simple

A benefit of these translucent coatings is the **increase to the energy efficiency of a building** without reducing square footage or changing the look of the surface. Additional benefits are mold and moisture resistance, thus **improving overall air quality**.

Because Syneffex[™] coatings do not rely on thickness as a function of the insulating ability, compression does not reduce the effectiveness. They also **provide a health benefit** by not harboring moisture, dust, mold, or dirt, which reduce the effectiveness of older forms of insulation and decrease air quality. Our coatings also **help keep building substrates dry**, increasing a wall's heat resistance and protecting surfaces from moisture damage.

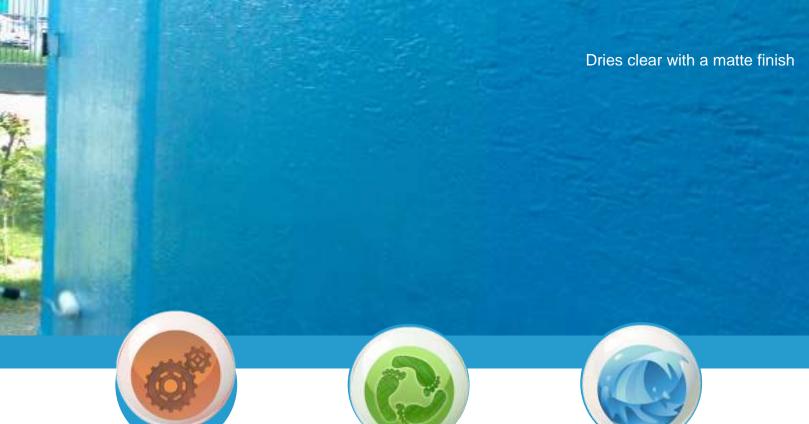



Insulating & protecting buildings with Syneffex™ technology provides multiple benefits.

Low VOC

Moisture Repellent

- ✓ Increases energy efficiency
- √ Clear, matte finish

Lead Encapsulant

- √ Resistant to mold/mildew growth
- Moisture repellent, yet breathable
- √ Can assist in earning LEED points
- ✓ Excellent adhesion to a variety of surfaces (wood, brick, drywall, concrete & more)
- Lead encapsulation that is clear with a smooth finish
- √ UV resistance
- ✓ Water-based, low VOC, non-toxic,

Sustainable Projects

Just a few of the organizations who have chosen award-winning Syneffex[™] coatings for their projects include: U.S. Navy, Suvarnabhumi International Airport (Bangkok), Frost Art Museum, Brunei Residential Palace, City of Rochester NY, Hyundai, American Red Cross, Mexico's Social Security & Health Administration, Naval Aviation Museum, University of Wisconsin-Madison.



Powerful Products | Simple to Apply

Roofs: CrystalShield™ roof coating

Standard application is 2 coats (5 mils/127 microns each), or 3 coats for metal roof

Walls/Ceilings/Skylights/Ducts: Energy Protect™ coating

Standard application is 3 coats (4 mils/100 microns each)

<u>Lead Abatement:</u> LeadX[™] lead encapsulation coating

Standard application is 2 coats (4 mils/100 microns each)
All products can be applied with a standard paint sprayer, brush, or roller.

Fast Payback

No matter where in the world you are, insulating is paramount to reducing building energy consumption and related GHG emissions. Our customers consistently report saving 20% to 40% on energy costs and payback in an average of 3 to 5 years. When you compare that to other energy efficiency technologies for buildings, it's quite impressive and gives you one of the fastest paybacks you can find!



Independent Testing | Thermal

Insulation

Syneffex™ coatings have undergone extensive independent 3rd party testing to multiple U.S. and International testing protocols. **The results have consistently been excellent.** And results from different laboratories across the world from each other, Student

consistently show similar results.

ISO 8990:1999: Thermal Performance of Buildings

3 coat coverage over 8cm cement wall with plaster Heat conduction reduced by 34.80% Thermal resistance increased by 28.98%

ASTM E1530: Resistance to Thermal Transmission


2 coat coverage over concrete tiles Heat conduction reduced by 29.7%


ASTM C518/ISO 8301 - Thermal Conductivity

4 coat and 8 coat at 32F/0C temperature over glass (yes, that's at freezing!)
Decrease in thermal conductivity of 10% at 4-coats and 33% at 8-coats

UKAS Guarded Hot Plate Thermal Insulation Test

6 coat coverage over plasterboard Thermal resistance increased by 40.0%

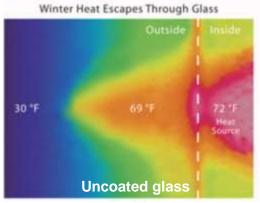

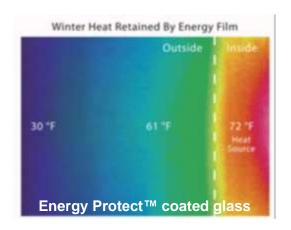



Independent Testing | Mold, Light Transmission, UV & More

Syneffex™ coatings are hydrophobic, meaning they repel water, so there is not enough moisture on or in the coating film for mold and mildew to grow. The mold resistance comes naturally, without the use of any dangerous biocides.


ASTM D590 & ASTM G21: Mold, Algae Resistance

2 coat coverage over wooden test panels

Passed with zero to minimal growth

PHOTOS FROM ASTM D5590 TESTING FOR RESISTANCE TO MOLD GROWTH







Syneffex™ coated panel: Zero mold growth.

Skylight Light Transmission | Spectrophotometer Testing

3 coat coverage over glass UV penetration reduced by 80% Visible light transmission of 90-92%

Water Vapor Transmission with RK303 Multicoater

One coat 35.830 WVTR (gm/m2/day) Two coats 25.515 WVTR (gm/m2/day)

Results show that the Syneffex™ thermal insulation coatings for buildings formed a barrier that allows the transmission of water vapor.



Field Studies | Energy & Temperature

Customers that insulate with Syneffex[™] coatings consistently report saving between 20% and 40% on building/home heating and cooling costs.

ENERGY USE IN KILOWATT HOURS Chart shows a customer's reduction of energy use in 3000 KWH after using Syneffex™ 2005, 2006, 2007 before EnergyPro Energy Protect™ on the 2000 building envelope. The average reduction was 46%. 1000 2010, 2011, 2012 after Energy Protect Appl Government data center internal temperature reduced by 27% after coating roof with **Data Center Interior Temperature** CrystalShield™ coating. 93.6

Before Crystal

After Crystal

CERTIFICATIONS

ASTM D5590 (Mold/Algae Resistance) ASTM G21 (Fungi Resistance) Resistance to Geocapsa spp.(Black Mold Resistance) ASTM E1530 (Thermal Conductivity)

Emissivity Permeability U/V Cabinet Testing

ASTM D-3359 (Adhesion) ASTM D-4541(Pull-Off Strength)

SPECIFICATIONS

Package Size Coverage Typical applied coat thickness Typical touch dry time for 1 coat Typical hard dry time Shelf life Color

Zero or minimal mold growth Zero or minimal mold growth No growth during 4-month accelerated testing

30% decrease in thermal conductivity

45% increase in thermal resistance 0.91

5 perms/inch @ 23 deg C.

Passed 10 year equivalent, with no discoloration

or loss of adhesion

0% 5B, edges remain smooth, no flaking

2400-2450 psi

150 S.F (14m2) per gallon at 3 coats 4 wet mils (100 microns) per coat 20 minutes to 1 hour 48-72 hours 2 years, from date of manufacture

Clear with matte finish

(Note: Over glass coating has a frosted look)



Testing by Anter Laboratories, Inc., a ISO 9001:9002 certified laboratory, according to specification ASTM E1530 for measurement of thermal conductivity. **Testing by AIHA accredited laboratory, EMSL Analytical, Inc. according to specifications ASTM D5590 "Standard Test Method for Determining the Resistance of Paint Films and Related Coatings to Fungal Defacement by Accelerated Four-Week Agar Plate Assay" and ASTM G21 "Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi." Testing by FLDOH laboratory BCS Laboratories, Inc. according to four month accelerated study period for "Resistance to Gleocapsa spp. on concrete tiles.

Syneffex™ | Be A Sustainable Leader

Corporate Office

Syneffex™ 717 17th Street, Ste. 1900 Denver, CO 80202 USA, Planet Earth

Customer Service

US & Canada: 1.800.858.3176 International: +1 720.452.2650 Contact: syneffex.com/contact-us/

Smart Chat: syneffex.com

Syneffex[™] develops and commercializes innovative applications for sustainability via the science of nanotechnology. Our patented product line is engineered to provide multiple benefits in a single product.

AWARDS

Sustainable Awards

BUILDINGS Magazine Top 2012 Money Saving Product

> **BUILDERNews Magazine** Best Product of 2008

QUALIFIED REMODELER Magazine A Top 100 Product of 2008

BUILDING PRODUCTS Magazine

JOURNAL OF ARCHITECTURAL **COATINGS** Magazine

We're Making a Difference. Daily.